



SOLUTIONS FOR PANELS

THERMOWELDING

HOT WELDED JOINTS

APPLICATIONS

SPM Decochoc, Decowood, Decotrend, Decoclean and Decochoc H₂O panels are made of antibacterial PVC. They are easy to clean and can be installed:

- from floor to ceiling with welded joints,
- in right or rounded angles, irrespective of the degrees or the radius,
- above the coverings of PVC floor coverings.

For a reliable watertightness, SPM has a range of welding rods matched to the colours of SPM profiles, allowing you to thermoweld one panel to another.

SPM and GERFLOR also provide a global solution for absolute watertightness and reliable junction: hot welded joints between the coving of the floor covering and the wall panel.


This system is optimised to work with the exclusive GERFLOR Corner System, and is particularly recommended for operating rooms and other rooms requiring a high level of hygiene.

DESCRIPTION

- Model: SPM welding rod
- Diameter: 4 mm
- Length: 100 m roll
- Material: flexible PVC
- Fixing: hot welded with welding machine
- Colours:
 - 33 standard for Decochoc
 - 5 standard for Decochoc H₂O




Decochoc H₂O // 5 standard colours



// 7 colours on request*

Decochoc // 33 colours

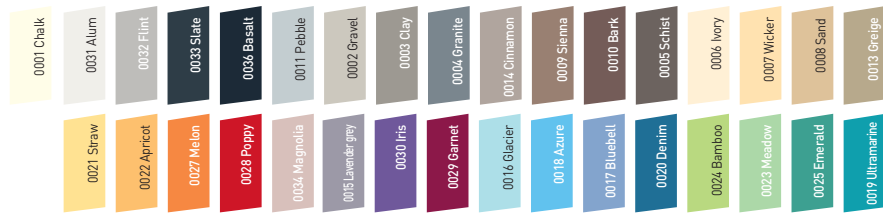

* with a minimum order quantity.


THERMOFORMING

PILLAR AND DOOR FRAME PROTECTION

WITH DECOCHOC, DECOSMIC, DECOWOOD AND DECOTREND PANELS

APPLICATIONS

In order to adapt to all building layouts, Decochoc, Decosmic, Decowood and Decotrend panels can be thermoformed to cover round pillars (diameter less than 800 mm) and complex door frames that can not be protected with simple L or U bends.

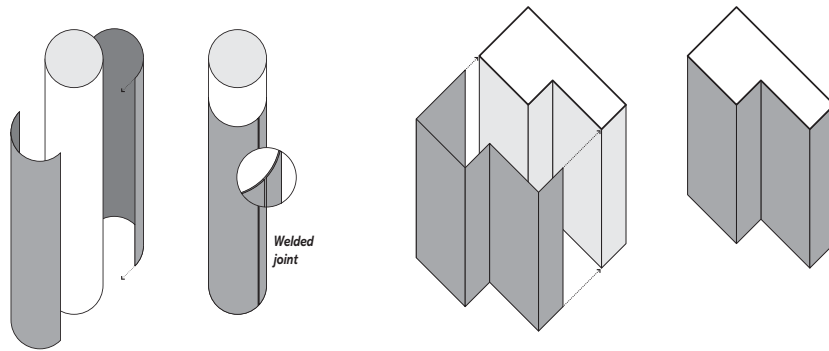

FIXING



SPM universal primer
(100 to 150 g required per m²)
5 l drum



SPM acrylic glue - Simple bonding
Solvent-free
(300 to 350 g required per m²) - Available in 6 or 14 kg jars



SPM multipurpose adhesive sealant
Solvent-free
290 ml cartridge (about 25 ml of cord)



Double-sided foam adhesive roll 4957/15 mm wide
(contact us prior to use)
25 m roll



Double-sided adhesive roll 4970/50 mm wide
For installation on doors or laminates
(contact us prior to use) - 50 m roll



Silicone joint for Decochoc, Decosmic, Decowood, Decotrend, Decoclean, and Decochoc H₂O panels (matching colours)
310 ml cartridge



Welding rod for Decochoc, Decowood, Decotrend, Decoclean and Decochoc H₂O panels (matching colours)
100 m roll

For further information about installation of SPM accessories and use of glues, silicon joints and welding rods, please consult our Installation Procedure Guide.