



DECOSMIC

PROTECTION AND COVERING PANEL - 2 MM METALLIC LOOK



APPLICATIONS


With its slightly grained, matt surface, Decosmic panel protects and decorates the walls and doors in your premises while also meeting hygiene and impact resistance requirements.

The product can be thermoformed for use on round pillars (diameter under 800 mm) and to ensure a perfect hygiene in the angles.

The metallic colours designed by SPM will embellish your spaces in an elegant, on-trend way (restaurant, hotel rooms, reception area, etc.) and bring a unique touch to your establishment.

DESCRIPTION

- Model: Decosmic protection and covering panel - metallic look
- Standard dimensions: 3 m x 1.30 m
- Custom options: cutting to size, bend into L/U, thermoforming, chamfer
- Thickness: 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: slightly textured
- Fixing: adhesive bonding with SPM acrylic glue or SPM multipurpose adhesive sealant. Joints between panels can be made using silicone joints or PVC welding rods, colour matched to the range
- Colours: 3 standard

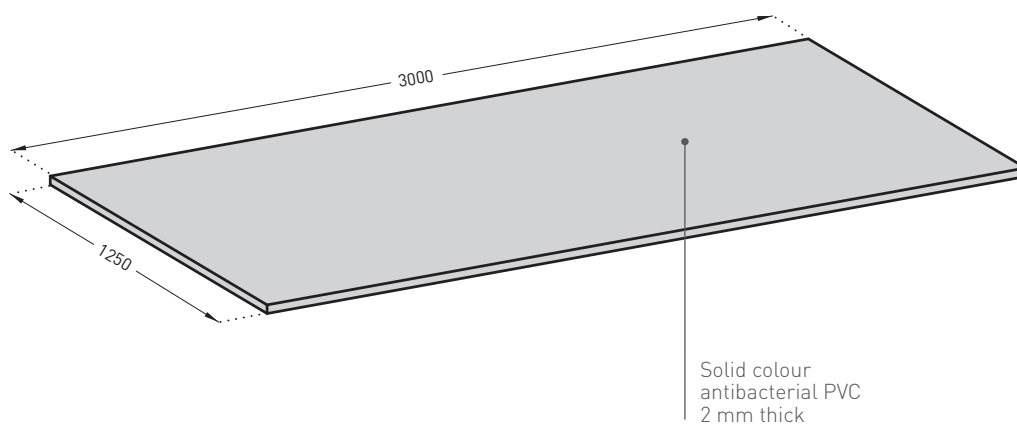

FOR AN IMPECCABLE FINISH:

- Fin'Alu: finishing and jointing profiles in satin silver anodised aluminium
- Silicone joints
- Welding rods

Colour coordinated with the panels




Decosmic // 3 colours




SPECIFICATION

- Description: protection and covering panel, metallic look (Decosmic as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and slightly textured surface. 3 m long, 1.30 m high, 2 mm thick.
- The level required for biocleaning should be validated for very high infectious risk areas such as operating theatres (*sector 4 according to the Pasteur Institute of Lille France*). The chemical and mark resistance should have been proved on the usual cleaning products according to NF EN ISO 26987. The ease of nuclear decontamination according to DIN 25415 / ISO 8690 should be excellent.
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions.

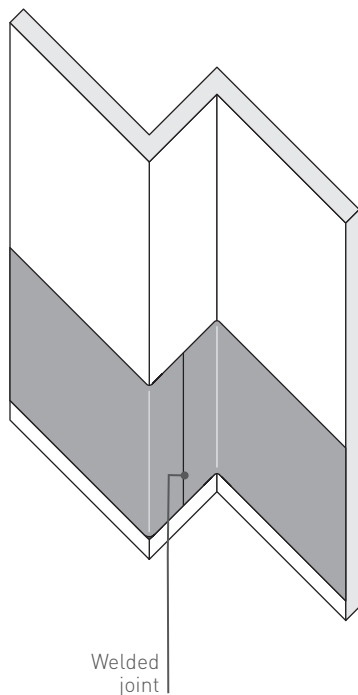

Welded joint

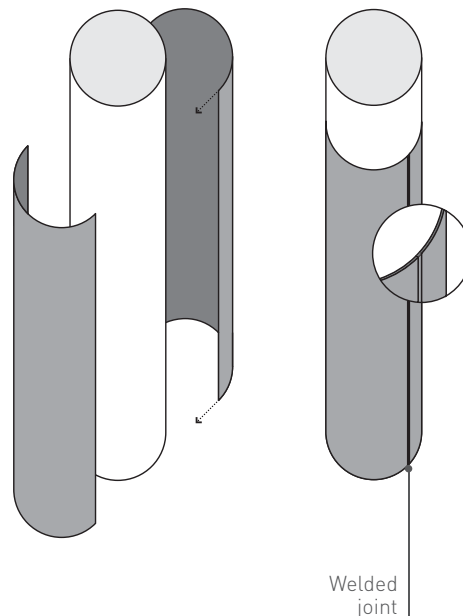

Welded joint

Specifications and section drawings on our website www.spm-international.com



bimobject BimObject in Revit and Archicad